



Jemiclad Supreme and Ablaze is the wall protection for the specifiers looking to make an impact.

Jemiclad can be heat formed to wrap internal and external corners, combined with welded joint method will provide the ultimate protection.

We've got you covered.

Specified and trusted by

- Great Ormand Street Hospital, UK.
- British Aerospace Engineering, UK.
- Annabel's (Billionaires Club), London, UK
- Ivy Restaurant, Dublin, Ireland.
- Gordon Ramsay's Hell's Kitchen, UK.
- Doodley Dogs, Pets at Home, UK.
- Prince Mohammed Bin Abdulaziz Hospital, Riyadh, Saudi Arabia - Operating Theatres.
- Jamie Oliver's Restaurants.
- Ministry of Defence, HMS Sultan, Gosport, UK - Showers and toilets
- Plub Leisure Centre, Pirmasens, Germany – Kitchens and Showers.

Product Description

Jemiclad Supreme and Ablaze are specially engineered 2.5mm homogeneous, smooth and non-porous wall and ceiling linings, that can be head formed around internal and external corners, reducing the need for corner guards. All joints can either be finished with a colour matched co-extruded trim or a hot air weld with a colour matched flexible PVC weld rod, then neatly trimmed off flush to give the ultimate hygienic surface, and a seamless finish which creates an airtight and watertight lining, which is a must have to tackle the constant fight with infection control. Jemiclad Pro is a clear investment that will give returns 24/7 for years to come. The three part specification is available from our website below.

- Durable and Hygienic.
- Excellent for Welding and Thermoforming.
- Can be printed on (see our PhotoJemic range).
- Can be combined with Jemiclad's other wall cladding products.
- ASTM E84 Class A fire rated, BS Class 0 Fire Propagation and Class 1 Spread of Flame, CAN UCL S102.2 tested and AUS-ASNZS 3837 1998 Group 1, EU EN13501B-S3-D0.
- Chemical Resistant and great impact resistance.
- 20 year product warranty.
- Can be combined with flash coving, poured floors and traditional tiles.

Typical Applications


- Hospitality
- Healthcare
- Operating Theatres
- Pharmaceutical
- Kindergarten
- Multi Family Bathrooms
- Multi Family Kitchen
- Back Splash
- Education
- Corridors
- WC's
- Storage Areas
- Shower Rooms

Jemiclad is fully bonded to the substrate using Jemifix all over adhesive eliminating the possibility of bacteria growth or vermin behind the panel. Once cured, the Jemifix 2-part adhesive is strong enough to prevent the panel from expanding and contracting, the curing time can be as little as 2 hours.


Installation times are improved over comparable systems due to the panels flexibility, working weight (single engineer), thermoformed corners, speed of cutting, adherence, jointing and cleaning.

A typical Operating Room can be installed in a single night shift and handed back hours after completion.


Jemiclad is a fully certified system holding the USA ASTM E84 Class A, CAN - Can/UCL-S102.2 and UK BS Class 0 fire certifications.

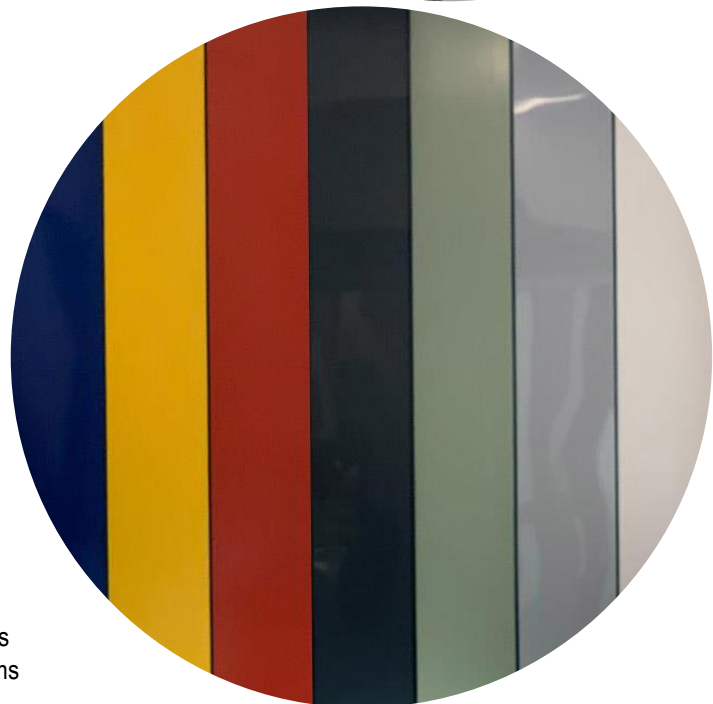


Supreme




The White One




The Light Grey One




The Dark Grey One



The Olive One



The Oyster White One




The Black One


Ablaze




The Dark Green One




The Yellow One




The Royal Blue One




The Orange One



The Lime One




The Sea Green One



The Bright Red One

Panel Sizes

Size	Weight
2500x1220mm (8x4') 2.5mm Thick	10.9kg (24lbs)
3000x1220mm (10x4') 2.5mm Thick	13.1kg (29lbs)
2750x1220mm (9x4') 2.5mm Thick (White and Pastel Grey only)	12kg (26lbs)

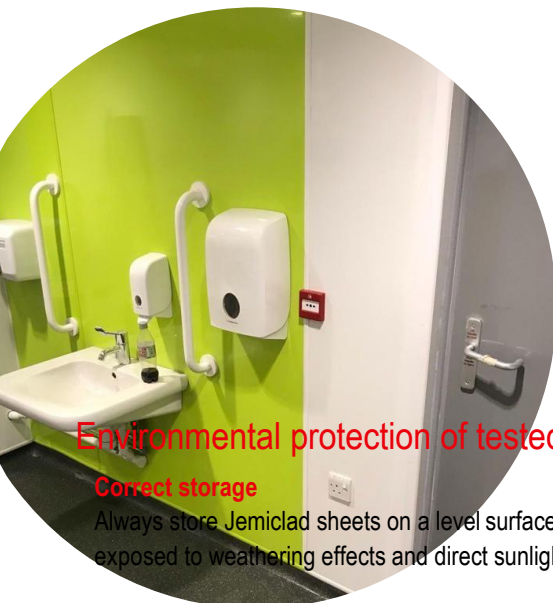

Environmental protection of tested reliability

Correct storage

Always store Jemiclad sheets on a level surface in a dry, air conditioned environment at about 59–68 °F (15–20 °C). The packaged sheets may not be exposed to weathering effects and direct sunlight.

Ecological manufacturing

In line with our environmental guidelines, Jemiclاد PVC-U sheets are safe for humans and the environment during their manufacture, use, and disposal. They are free of formaldehyde, asbestos, lindane, PCB, PCP, CFCs, cadmium, and lead and do not contain any monomers, biocides, or plasticisers. At the end of their service lives, the sheets or sheet residue can be recycled. They are processed in shredders or grinders and then introduced to the manufacturing process for new sheets.

Certified quality

True to our "Ever better principle", the acclaimed high quality of our products bear the hallmarks of our research and development work as well as decades of experience with synthetic materials. Tests are conducted over all stages from the incoming raw materials to the final inspection of the finished products. Regular examinations by independent testing institutes confirm this high level of care. Logically, our quality assurance system has been DIN ISO 9001 certified.



Technical Data

Mechanical properties	European Standard	USA Standard	Unit	WA
Apparent density*	DIN EN ISO 1183	ASTM D792	g/cm ³	~ 1,43
Yield stress (tensile strength)	DIN EN ISO 527	ASTM D638	Mpa	□ 55
Elongation at tear	DIN EN ISO 527	ASTM D638	%	□ 15
Flexural strength	DIN EN ISO 178	ASTM D790	Mpa	□ 80
Compressive strength	Based on DIN EN ISO 844		Mpa	□ 70
Modulus of elasticity	DIN EN ISO 527-2/1A/50	ASTM D638	Mpa	□ 3000

Notched impact strength	DIN EN ISO 179-1ePA	ASTM D256	KJ/ m ²	>8
Impact strength	DIN EN ISO 179		KJ/ m ²	
0 °C				no failure
-20 °C				-
-30 °C				-
-40 °C				-
Water Vapour Transmission		ASTM E96	g/m ² /24hr	<0.12
Ball indentation hardness (358 N/30 s)	DIN EN ISO 2039		Mpa	~ 100

Thermal properties	European Standard	USA Standard	Unit	WA
Vicat softening temperature	DIN EN ISO 306 (Process B50)		°C	75
Deflection temperature	DIN EN ISO 75	ASTM D648	°C	60
Coefficient of linear thermal expansion from – 30 °C to + 50 °C	DIN EN ISO 11359-2 (Process Ae)		mm/mK	0,08
Thermal conductivity from 0 °C to + 60 °C	DIN EN ISO 22007	ASTM C177	W/mK	0,16

Certifications

Properties	Standard	Unit	Value
Water absorption after 7 days	DIN EN ISO 62	%	<0.08
Fire behaviour: surface spread of flame	BS 476 Part 7 (1987)	Class 1	1–4 mm
		Class 1Y	2.5–3 mm
Fire behaviour: fire propagation	BS 476 Part 6 (1989)	Class 0	
Fire behaviour	DIN 4102 (DE)	B1	1–3 mm
	NF P 92-501 (FR)	M1	1.2–8 mm
	USA – ASTM E84 Class A	M2	10–30 mm
	CAN – Can/UCL-S102.2		
	UL 94 (USA)	V0/5VB	1–30mm



Contact us

Jemiclad UK (Head Quarters)

Tel. 0044 (0)1903 722522

Unit x1, Rudford Ind. Estate, Ford, West Sussex, BN18 0NF

sales@jemiclad.co.uk www.jemiclad.co.uk

Visit us
onthe internet

Further details on the extensive products offered by Jemiclad can be found here:

